


Mono PM

1-LAYER WATERPROOFING BITUMEN MEMBRANE

Mono PM is a bitumen membrane well adapted to the harsh Swedish climate.

Product data	
Dimension	1x7,5 m
Colour	grey, white, matt black, crystal black, red, green
Weight per m ²	5800 g
Weight per roll	43 kg
Transport unit	20 rolls per pallet
Additional information can be found in the DoP	

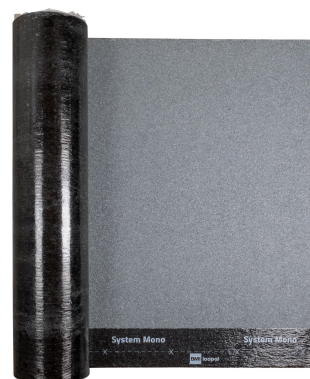

Description

Mono PM, SEP 5800, is built around a strong polyester/glass reinforcement, impregnated and coated with SBS-modified bitumen on both sides. The underside is coated with easily activated, grooved patterned asphalt which makes it easy to weld, and which is protected by a thin plastic film which is melted in connection with the welding. The top side is coated with slate granules. The products are slate-free along one 12 cm edge to facilitate welding of longitudinal joints and there is also a marking for the location of the fasteners. Mono PM meets waterproofing class TKY-A-0234 and the fire requirements according to Broof (t2). The Sd value of the product is 250-300 m.

Function

The waterproofing product must withstand the mechanical stress which the waterproofing layer is subjected to on the roof. Mono PM can be applied to both solid and soft surfaces. The membrane must be mounted by mechanical fastening and joint welding or string and joint welding.

Storage

The material is delivered standing on a disposable pallet. Keep the rolls upright and protected from moisture and direct sunlight.